




### Our stand-alone solution in the field of pallet changing technology

- Suitable for repalletizing from and to the common standard pallets such as Euro, industrial and half pallets.
- Vertical lifting movement by electromechanical drive.
- Horizontal lifting movement by pneumatics.
- Optimal for the food/non-food sector for stable goods with a homogeneous surface, e.g. fruit and vegetable boxes, PET bottles or cartons.
- Load capacity 1,000 kg.
- The formation of layers is also possible.
- Integrated high-speed door as access prevention.
- Operation is via the user-friendly touch panel.
- There, the dimensions, such as the box height, can also be parameterized for each customer.
- CE marking.
- Surface powder-coated in your RAL color.
- Special version on request.

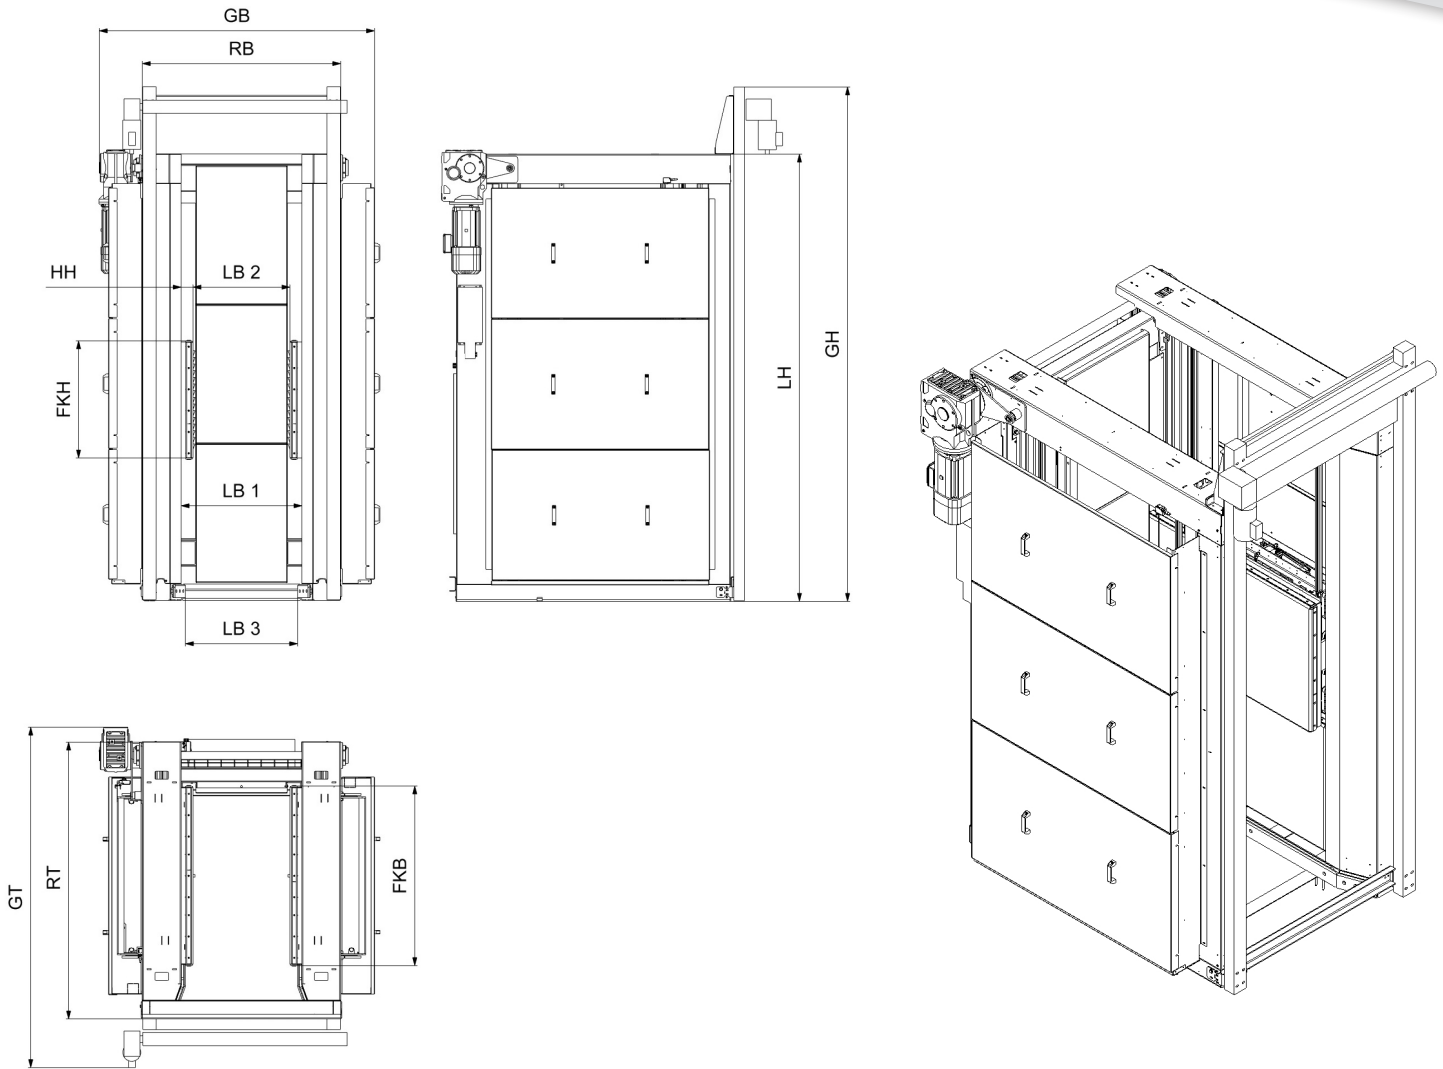

**List of abbreviations**

<b>FGL</b>	= Length of conveyed material	<b>HH</b>	= Horizontal stroke	<b>GT</b>	= Overall depth	<b>LB 2</b>	= Clear width 2
<b>FGB</b>	= Width of conveyed material	<b>LH</b>	= Clear height	<b>RB</b>	= Frame width	<b>LB 3</b>	= Clear width 3
<b>FKH</b>	= Lift car height	<b>GH</b>	= Overall height	<b>GB</b>	= Overall width		
<b>FKB</b>	= Lift car width	<b>RT</b>	= Frame depth	<b>LB 1</b>	= Clear width 1		

**Standard dimensions in mm (Special versions are possible on request)**

Conveyed material		lift car		Machine dimensions									
FGL	FGB	FKH	FKB	HH	LH	GH	RT	GT	RB	GB	LB 1	LB 2	LB 3
1200	800	890	1350	120	3350	3850	2100	2500	1490	3200	900	730	840
600	800	890	1350	120	3350	3850	2100	2500	1490	3200	900	730	840
1200	1000	890	1350	120	3350	3850	2100	2500	1690	3400	1100	930	1040