
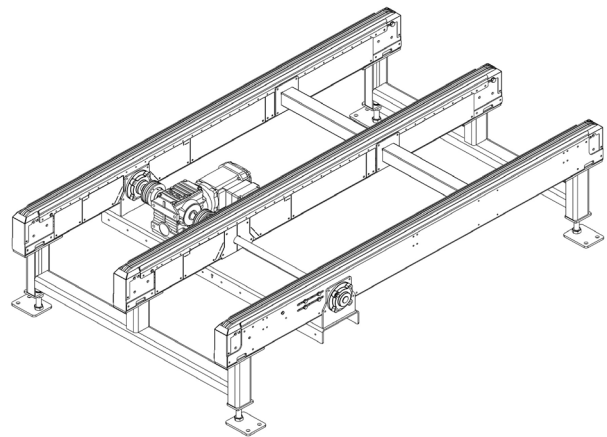
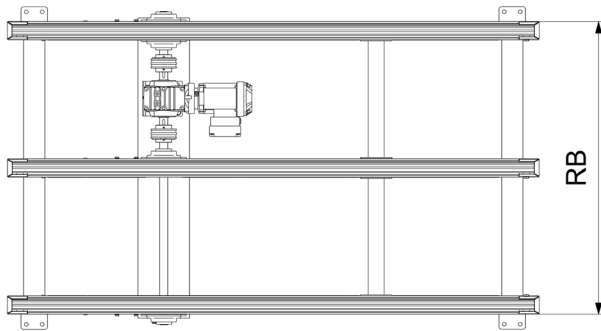



Wide range of variants - chain conveyor in 2- up to 5-strand design

- Suitable for the horizontal transport of full and empty pallets (e.g. Euro, industrial and half pallets), pallet cages, workpiece carriers and skids.
- Drive purely electromechanical.
- Load capacity up to 4,000 kg.
- Speed up to 0.3 m/s as standard.
- Available as a 2-5-strand chain conveyor.
- Depending on the requirements, a 10B1, 10B2 or 16B1 roller chain is used for each chain strand.
- The conveyor chain is guided in a plastic slide rail or optionally in a steel guide.
- The integrated tensioning station makes it easy to retension the chain.
- The drive station is located between the lines or arranged under the track.
- Adjustable uprights are used to compensate for uneven floors.
- Use at normal room temperature and down to -30 °C in the deep-freeze area
- Surface sendzimir galvanised or in your RAL colour powder-coated.
- Optionally, driven web overlaps, traversing devices, tread plates between the chain strands, end stops, ram gates, feed chutes or centring stops can be implemented.
- Special design on request.

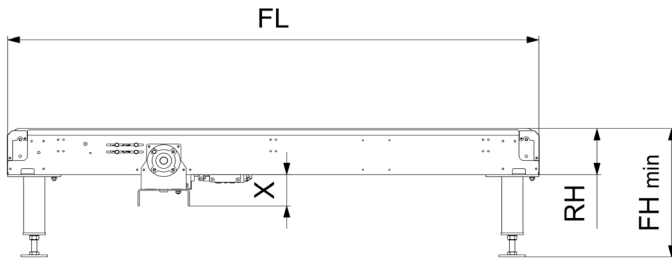

List of abbreviations

FGB	= conveyed material width	RH	= frame height	FGG	= conveyed material weight per storage location
KA	= chain spacing	RB	= frame width	x	= drive motor design*
FHmin	= conveying height	N	= amount of of chain strands		* depends on the design of the drive motor

Standard dimensions in mm (Special versions are possible on request)

Transport direction	Conveyed material	Dimensions					Carrying capacity in kg
		KA	FHmin	RH	RB	N	
Crosswise	FGB	KA	FHmin	RH	RB	N	FGG
Euro	1200	1075	350	180	1150	2 - 4	50 - 4000
Indu	1200	1075	350	180	1150	2 - 4	50 - 4000
Half	600	475	350	180	550	2 - 4	50 - 4000
Lengthwise							
Euro	800	700	350	180	775	3	50 - 4000
Indu	800	900	350	180	975	3	50 - 4000
Half	1000	700	350	180	775	3	50 - 4000
Euro & Indu	800 / 1000	680 / 730	350	180	1000	5	50 - 4000