

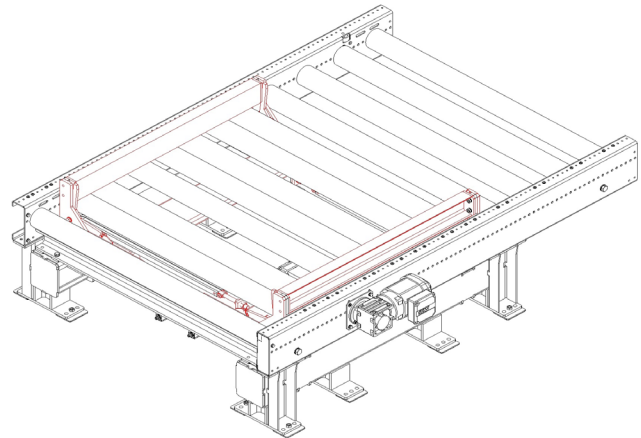
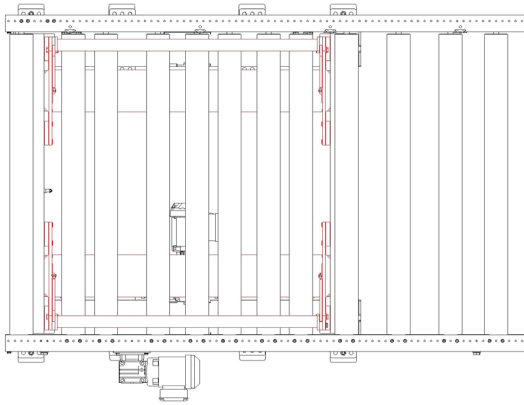


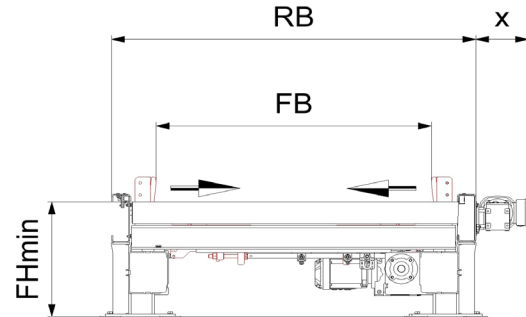

Centring of the conveyed goods in the horizontal conveyor technology zone

- Suitable for the centring of full and empty pallets (e.g. Euro, industrial and half pallets), pallet cages, workpiece carriers etc. on a roller conveyor.
- Purely electromechanical drive.
- Load capacity incl. pallet up to 1,200 kg.
- Speed up to 0,05 m/s as standard.
- Detection of the pallet using 4 safety edges.
- Use at normal room temperature and down to -30 °C in the deep-freeze area.
- Surface sendzimir galvanised or in your RAL colour powder-coated.
- Special design on request.

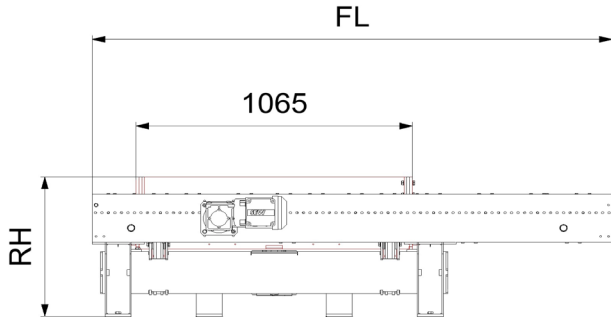

List of abbreviations

FGB	= conveyed material width	RH	= frame height
FB	= conveying width	FGG	= conveyed material weight
RB	= frame width	x	= drive motor structure*
FHmin	= conveyor height		* depends on the design of the drive motor

Standard dimensions in mm (Special versions are possible on request)

Conveyed material	Dimension				Carrying capacity in kg
	FGB	FB	RB	FHmin	
800	860	1200	400	420	25 - 1200
1000	1060	1400	400	420	25 - 1200
1200	1260	1600	400	420	25 - 1200