
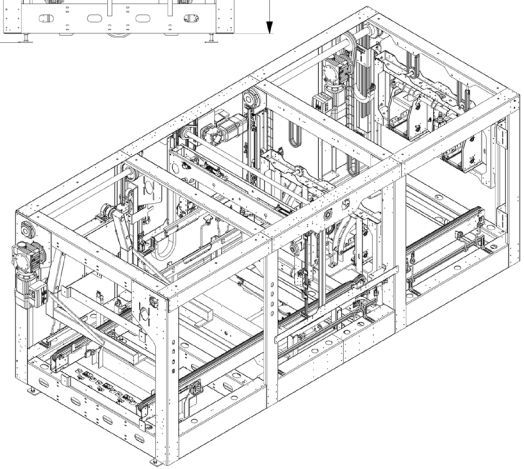
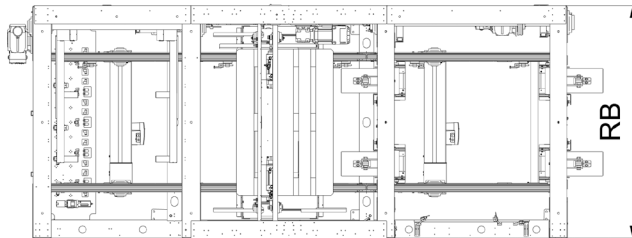
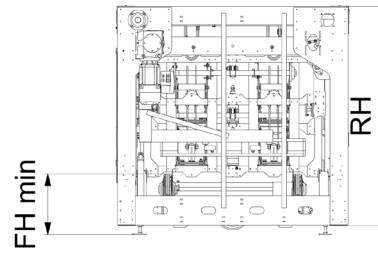


Optimum space usage thanks to the nesting and de-nesting of empty pallets

- Suitable for nesting and de-nesting empty pallets (e.g. Euro and industrial pallets).
 - Capacity of max. 24 pallets (600 kg) per stack.
 - Optimum utilisation of the spaces between pallets.
 - Adjustable uprights are used to compensate for uneven floors.
 - Use at normal room temperature and down to -5 °C.
 - Surface sendimir galvanised or powder-coated in your RAL colour.
 - Special design on request.
- Key facts:
 1. Save every 4th articulated truck: 561 conventionally stacked BUT no less than 728 nested pallets can be transported in a conventional articulated truck (13.6 m long) - an increase in loading capacity of 30%.
 2. Saving of expensive storage space in the high-bay warehouse.
 3. No manual nesting and de-nesting necessary.
 4. High throughput: up to 450 pallets per hour can be nested and de-nested.
- > The resulting advantages: **Cost reduction, emission reduction, ergonomics & safety at the workplace, time savings and much more.**

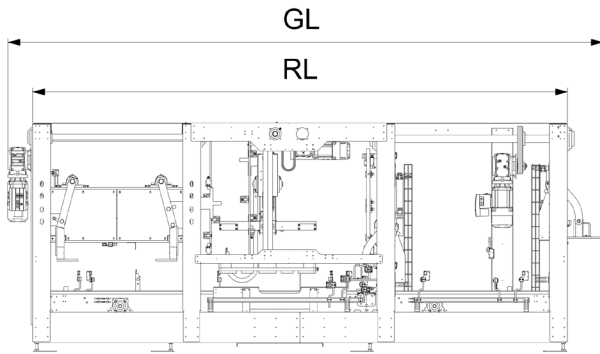

List of abbreviations

GL	= total length	FGG	= conveyed material weight
RL	= frame length	RH	= frame height
RB	= frame width		
FHmin	= conveyor height		

Standard dimensions in mm (Special versions are possible on request)

Conveyed goods	Dimensions					Carrying capacity in kg
	GL	FHmin	RB	RL	RH	
Pallet type						FGG
Europallet	5000	450	1920	4425	1810	600 (24 Pallets)