




## Energy-saving and environmentally friendly conveying with gravity

- Suitable for the transport of full and empty pallets (e.g. Euro pallets, industrial pallets and half pallets), pallet cages, workpiece carriers and skids.
- No drive required - the conveyed goods are moved by their own gravity.
- Load capacity up to 1,500 kg per storage space.
- One brake support roller is used per storage location, which ensures extremely gentle braking of the conveyed goods.
- Gradients of 2 - 4 ° can be realised.
- The galvanised support rollers (ø 89 mm) have a wall thickness of 3 mm or 5 mm.
- Thanks to the continuous rows of holes, maximum flexibility can be guaranteed.
- Adjustable uprights are used to compensate for uneven floors.
- Use at normal room temperature and down to -30 °C in the deep-freeze area.
- Sendzimir galvanised surface or powder-coated in your RAL colour powder-coated.
- Special design on request.

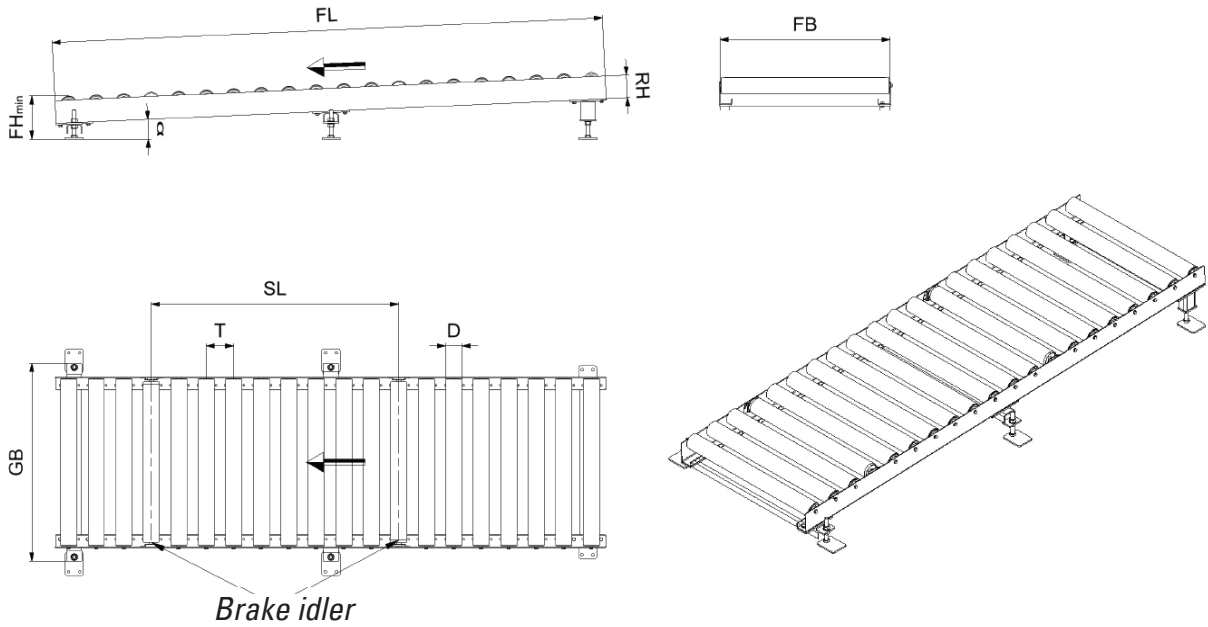

### List of abbreviations

<b>FGB</b>	= conveyed material width	<b>RH</b>	= frame height	<b>Alpha</b>	= gradient
<b>FB</b>	= conveying width	<b>T</b>	= division of roles	<b>FGG</b>	= conveyed material weight per storage location
<b>GB</b>	= total width	<b>D</b>	= outer diameter of the idler roller	<b>SL</b>	= parking space length

### Standard dimensions in mm (Special versions are possible on request)

Conveyed material	Dimensions								Carrying capacity in kg
	FB	GB	FHmin	RH	T	D	S	Alpha	
800	926	1085	170	125	125 - 250	89	3/5	2 - 4 °	25 - 1500
1000	1126	1285	170	125	125 - 250	89	3/5	2 - 4 °	25 - 1500
1200	1326	1485	170	125	125 - 250	89	3/5	2 - 4 °	25 - 1500